


Features

- Low Reverse Current
- Low Forward Voltage Drop
- High Current Capability
- Plastic Material - U/L Flammability Classification 94V-0

DISCONTINUED,
NOT RECOMMENDED FOR NEW DESIGNS,
USE 2A01G - 2A07G

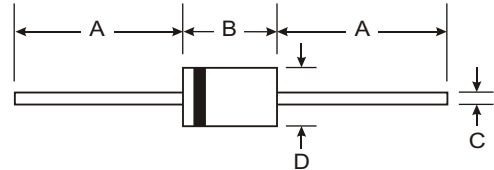

Mechanical Data

- Case: DO-15, Molded Plastic
- Leads: Solderable per MIL-STD-202, Method 208
- Polarity: Color Band Denotes Cathode
- Approx Weight: 0.4 grams
- Mounting Position: Any

DO-15		
Dim	Min	Max
A	25.4	—
B	5.8	7.6
C	0.71	0.86
D	2.6	3.6
All Dimensions in mm		


Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.


Characteristic	Symbol	RL 201	RL 202	RL 203	RL 204	RL 205	RL 206	RL 207	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current 9.5mm Lead Length @ $T_A=50\text{ C}$	$I_{(AV)}$	2.0							A
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	70							A
Maximum Instantaneous Forward Voltage at 2.0A DC	V_F	1.0							V
Maximum DC Reverse Current @ $T_A = 25\text{ C}$ at Rated DC Blocking Voltage @ $T_A = 125\text{ C}$	I_R	5.0 50							A
Maximum Full Load Reverse Current Full Cycle Average 9.5 mm lead length @ $T_L = 75\text{ C}$	I_R	30							A
Typical Junction Capacitance (Note 1)	C_J	40							pF
Typical Thermal Resistance	R_{JC}	40							C/W
Operating and Storage Temperature Range	T_J, T_{STG}	-65 to 150							C

Notes: 1. Measured at 1.0MHz and applied reverse voltage of 4.0 volts.


DISCONTINUED,
NOT RECOMMENDED FOR NEW DESIGNS,
USE 2A01G - 2A07G

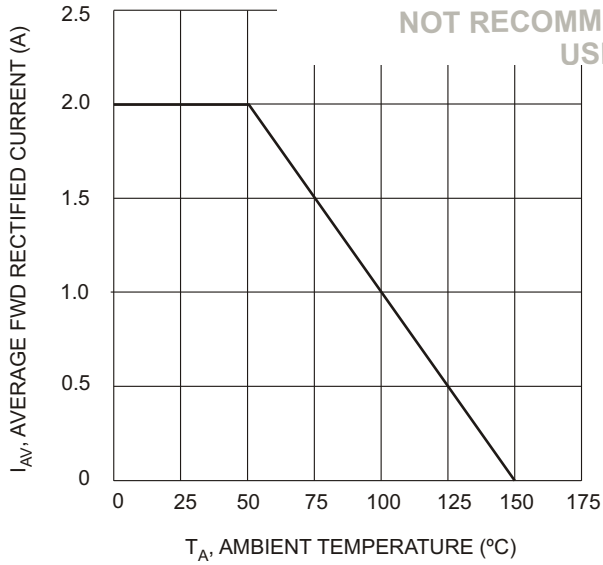


T_A , AMBIENT TEMPERATURE (°C)
Fig. 1, Forward Current Derating Curve

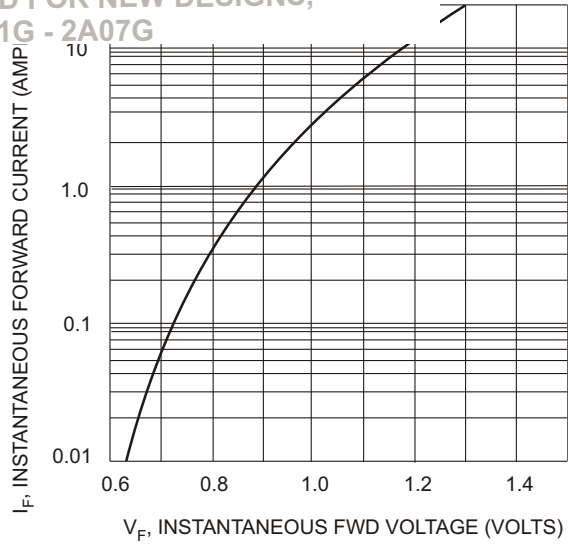


V_F , INSTANTANEOUS FWD VOLTAGE (VOLTS)
Fig. 2, Typical Forward Characteristics

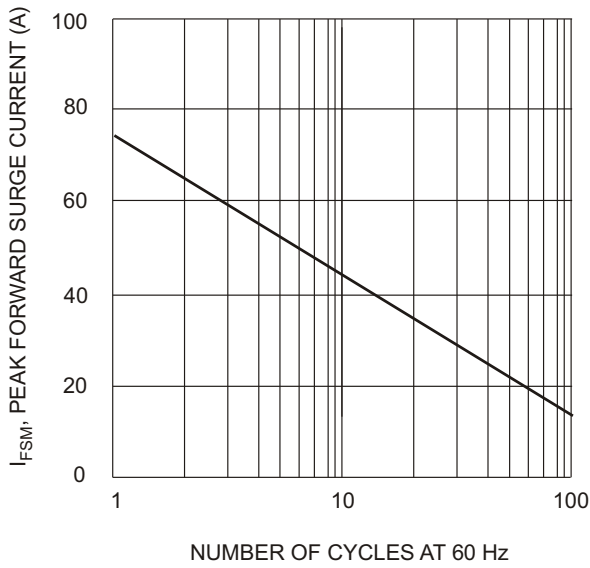

NUMBER OF CYCLES AT 60 Hz
Fig. 3, Maximum Non-Repetitive Surge Current

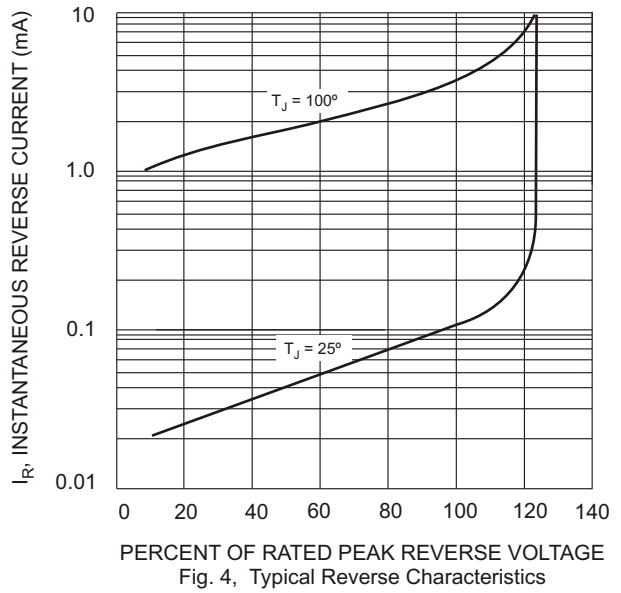

PERCENT OF RATED PEAK REVERSE VOLTAGE
Fig. 4, Typical Reverse Characteristics

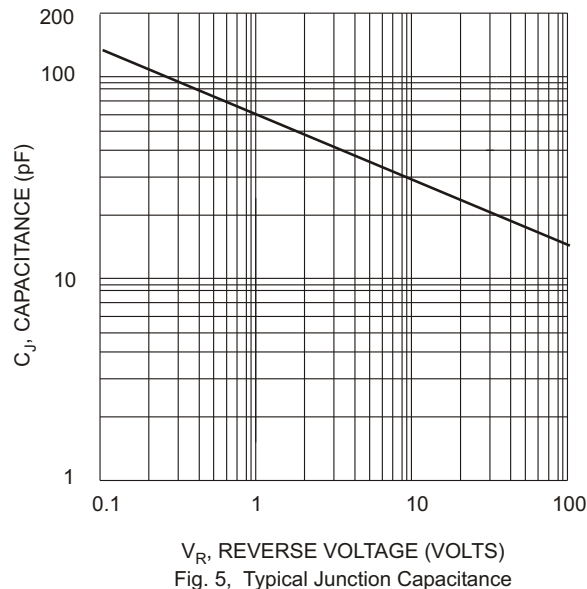

V_R , REVERSE VOLTAGE (VOLTS)
Fig. 5, Typical Junction Capacitance

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

DISCONTINUED,
NOT RECOMMENDED FOR NEW DESIGNS,
USE 2A01G - 2A07G