
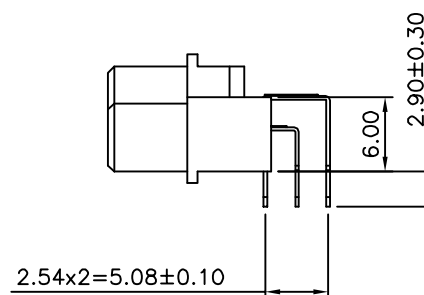
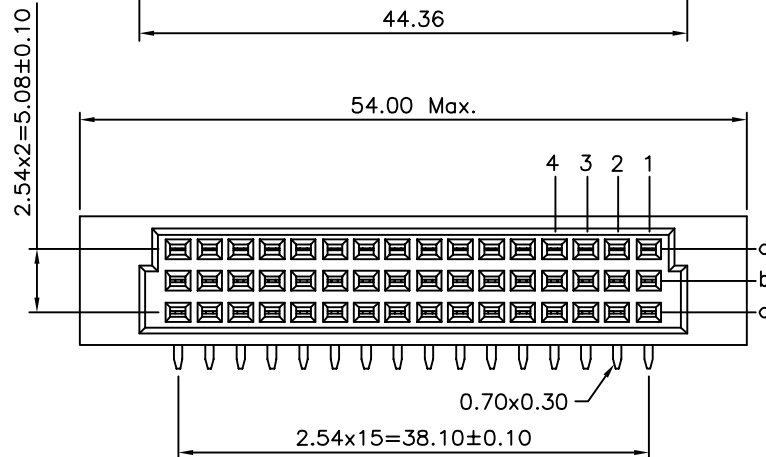
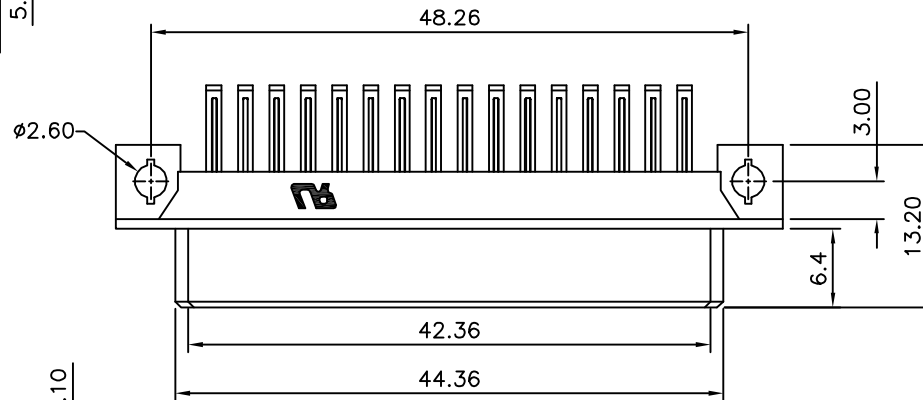
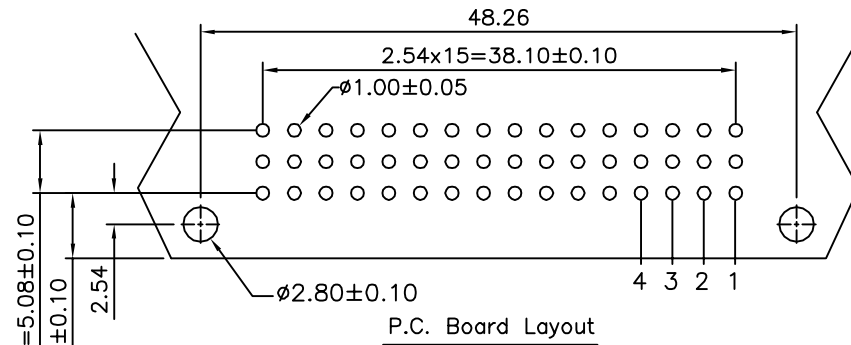


SPECIFICATION

Current Rating:2Amp
 Dielectric Withstanding Voltage:1000V AC For 1 Minute
 Insulation Resistance:1000 Megaohms Min. At 500V DC
 Contact Resistance:30 Milliohms Max. At 100mA DC
 Operation Temperature:-55°C~+105°C
 Housing:30% Glass Filled PBT UL94V-0
 Contacts:Phosphor Bronze,Gold Plated On Contact Area,
 Tin Plated On Solder Tail
 RoHS Compliant



Item No.	Pitch	Position	Rows With Contacts	Contact Arrange
05644	2.54mm	32	a - c	
05645		48	a b c	

DRAWING No.

05645

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

XYH

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.5
 .X ±0.25
 .XX ±0.15

SCALE


NONE

REV.

BO

UNIT

mm



BO

NEW RELEASE

HZF

08/20/2009

NO. REV.

REVISIONS

CHK

DATE