

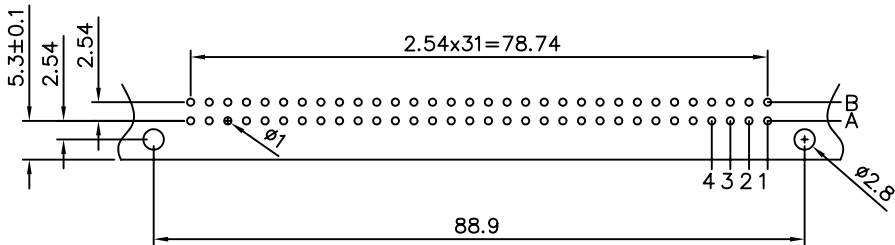
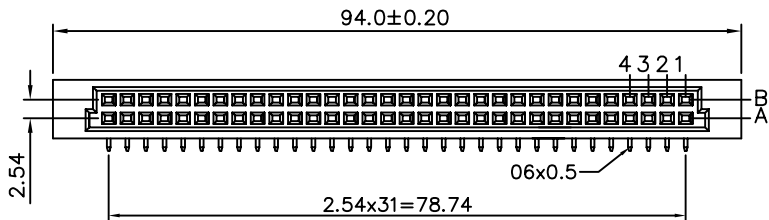


SPECIFICATIONS
Current Rating: 2 Amp
Dielectric Withstanding Voltage: AC 1000V For 1 Minute
Insulator Resistance: 1000 Megohms Min. At DC 500V
Contact Resistance: 30 Milliohms Max. At DC 100mA
Operating Temperature: -55°C~+105°C
Housing: 30% Glass Filled PBT,UL 94V-0
Contact: Phosphor Bronze,Gold(2~3u")/Tin(80~100u")



P.C. Board Layout

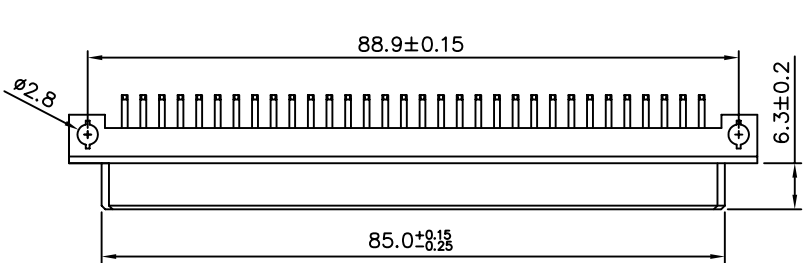

DRAWING No.

05632

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

SCALE

NONE


REV.

A1

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.25
.XX ±0.10
ANG. ±5°

UNIT

mm



A1

Modify Data

BECKY

08/03/2006



A0

NEW RELEASE

BECKY

07/19/2004

NO. REV.

REVISIONS

CHK

DATE