

SPECIFICATIONS:

Current Rating : 2A

Dielectric Withstanding Voltage : AC1000V

For 1 Minute

Insulation Resistance : 1000Megohms Min.


At DC 500V

Contact Resistance : 30 Milliohms At DC 100mA




Operating Temperature : -55°C To +105°C

Housing : 30% Glass Filled PBT UL 94V-0

Contacts : Phosphor Bronze

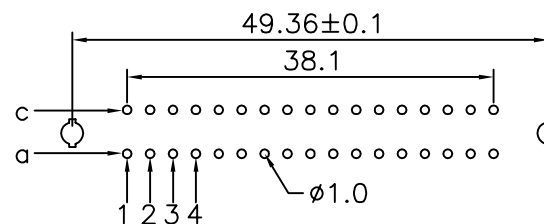

P.C. Board Layout

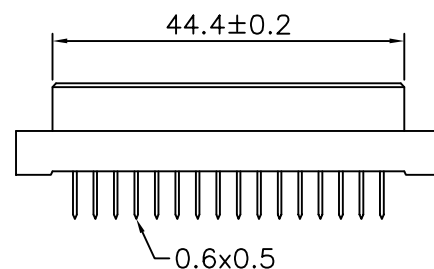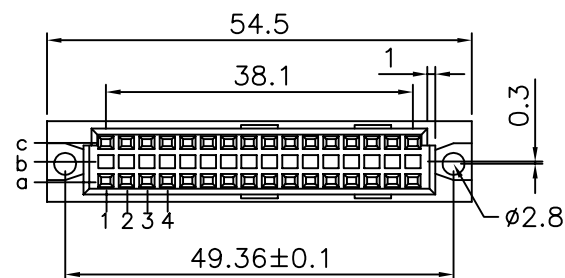

	X Length	1	2	W1	W2
		4.0	2.5	13	17
Pitch	Position	Rows With Contacts		Contact Arrange	
2.54mm	32	a	-	c	

DRAWING No.

05640

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

.X ±0.38

.XX ±0.25

AWG.

UNIT mm



AREA

REVISIONS

CHK

DATE