

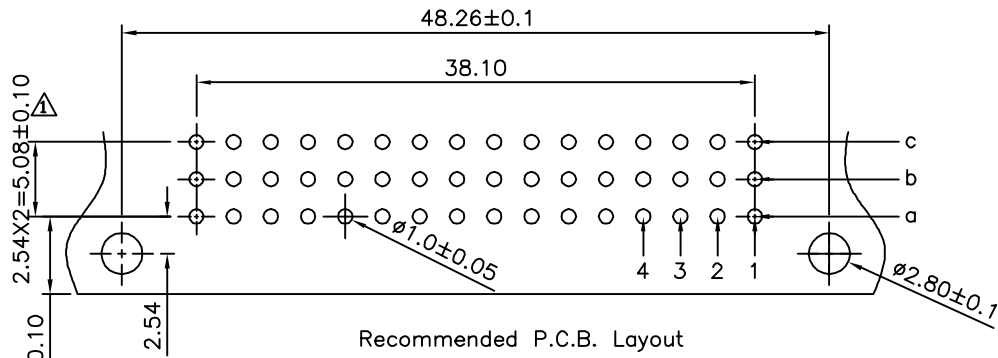
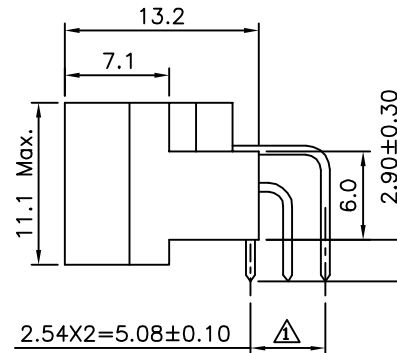


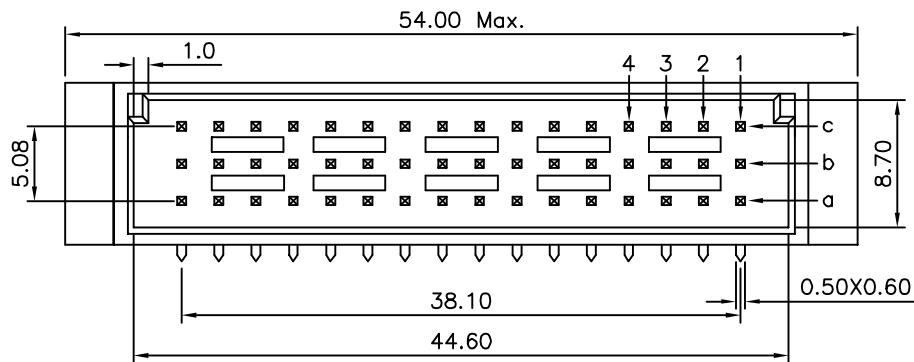

△ SPECIFICATION

Current Rating:2 Amp
 Dielectric Withstanding Voltage:1000V AC For 1 Minute
 Insulator Resistance:1000 Megaohms Min. At DC 500V
 Contact Resistance:20 Milliohms Max. At DC 100mA
 Operating Temperature:-55°C~+125°C
 Housing:PBT+G.F.(UL94V-0)
 Contacts:Brass,Gold Flash On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 RoHS Compliant

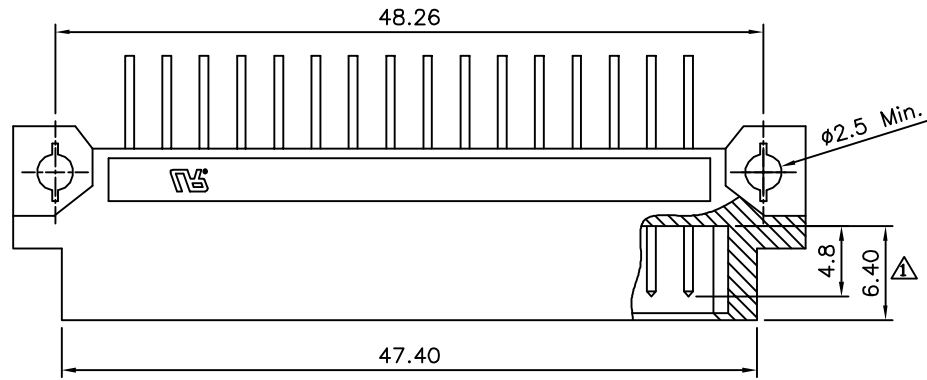

Item No.	Pitch	Position	Rows With Contacts	Contact Arrange
05634	2.54mm	48	a b c	

DRAWING No.

05634

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.5
 .X ±0.25
 .XX ±0.15

SCALE


NONE

REV.

B1

UNIT

mm



NO. REV.

B1 Modify Data

B0 NEW RELEASE

REVISIONS

CHK

DATE

HZF

05/30/2013

HZF

08/22/2009