

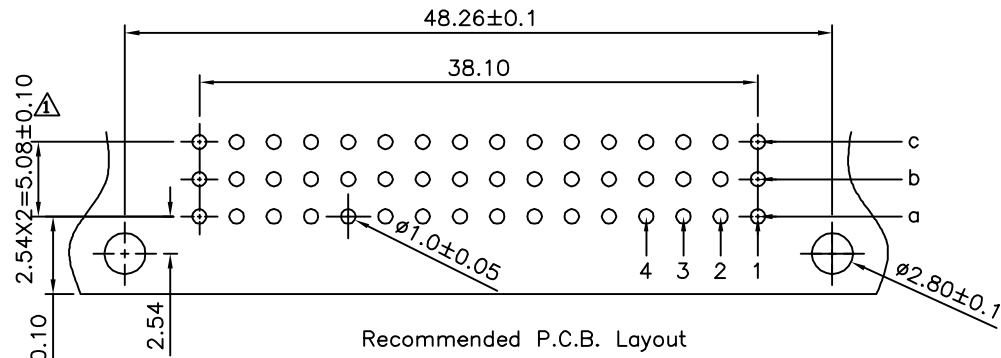
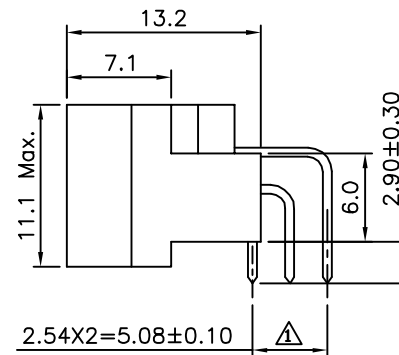


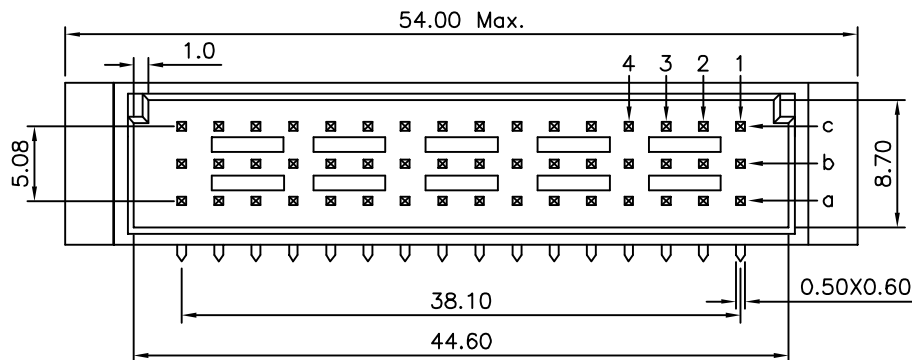

△ SPECIFICATION

Current Rating: 2 Amp
 Dielectric Withstanding Voltage: 1000V AC For 1 Minute
 Insulator Resistance: 1000 Megaohms Min. At DC 500V
 Contact Resistance: 20 Milliohms Max. At DC 100mA
 Operating Temperature: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
 Housing: PBT+G.F.(UL94V-0)
 Contacts: Brass, Gold Flash On Contact Area, Tin
 Plated On Solder Tails, Over Nickel
 RoHS Compliant

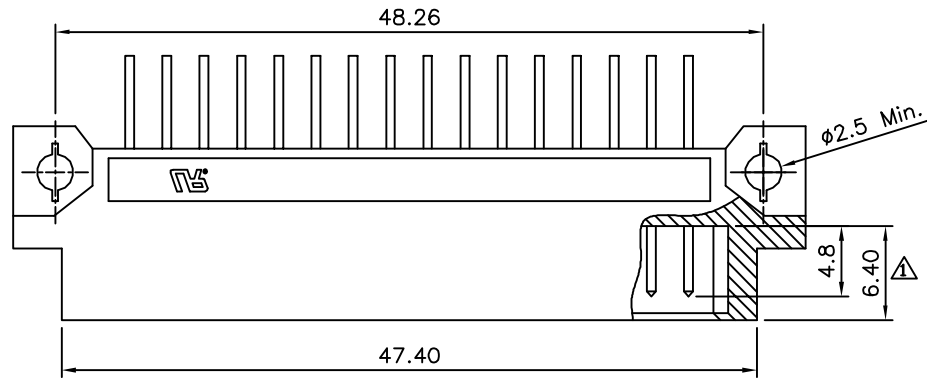

Item No.	Pitch	Position	Rows With Contacts	Contact Arrange
05634	2.54mm	48	a b c	

DRAWING No.

05634

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ± 0.5
 .X ± 0.25
 .XX ± 0.15

SCALE

NONE

REV.

B1

UNIT

mm

△

△

NO. REV.

B1

Modify Data

B0

NEW RELEASE

REVISIONS

CHK

HZF

DATE

05/30/2013

08/22/2009