

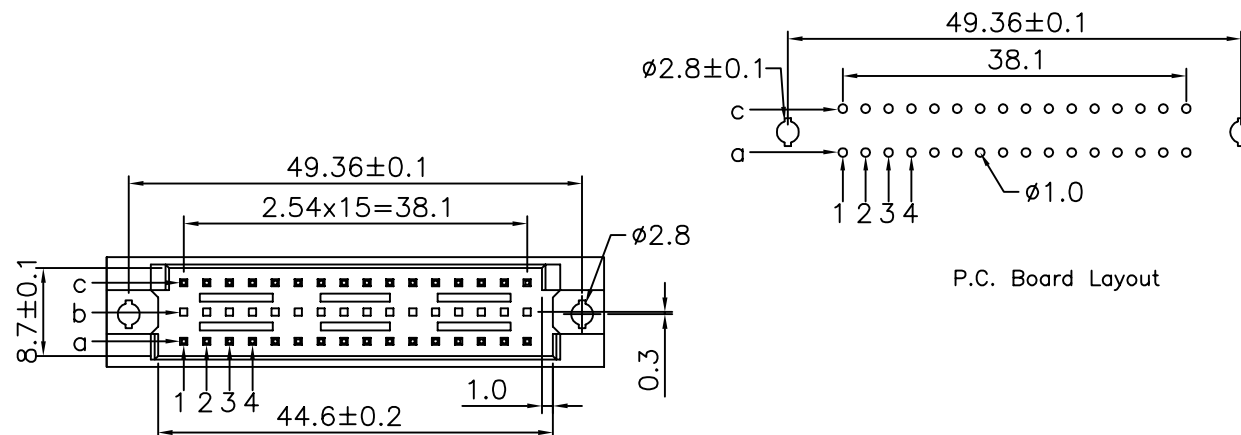




SPECIFICATIONS:
 Current Rating : 2A
 Dielectric Withstanding Voltage : AC1000V
 For 1 Minute
 Insulation Resistance : 1000Megohms Min.
 At DC 500V
 Contact Resistance : 30 Milliohms At DC 100mA
 Operating Temperature : -55°C To +105°C
 Housing : 30% Glass Filled PBT UL 94V-0
 Contacts : Brass

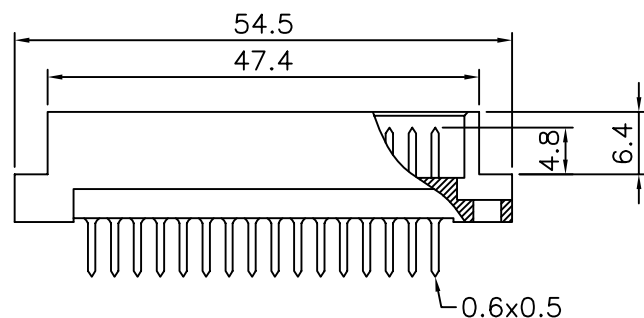

Pitch	Position	X Length		Rows With Contacts	Contact Arrange
		1	2		
2.54mm	32	4.6	6.3	13 17	c b a 1 2 3 4

DRAWING No.

05635

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

.X ±0.38

.XX ±0.25

AWG.

UNIT mm



SCALE

NONE

REV.

A

AREA

REVISIONS

CHK

DATE