

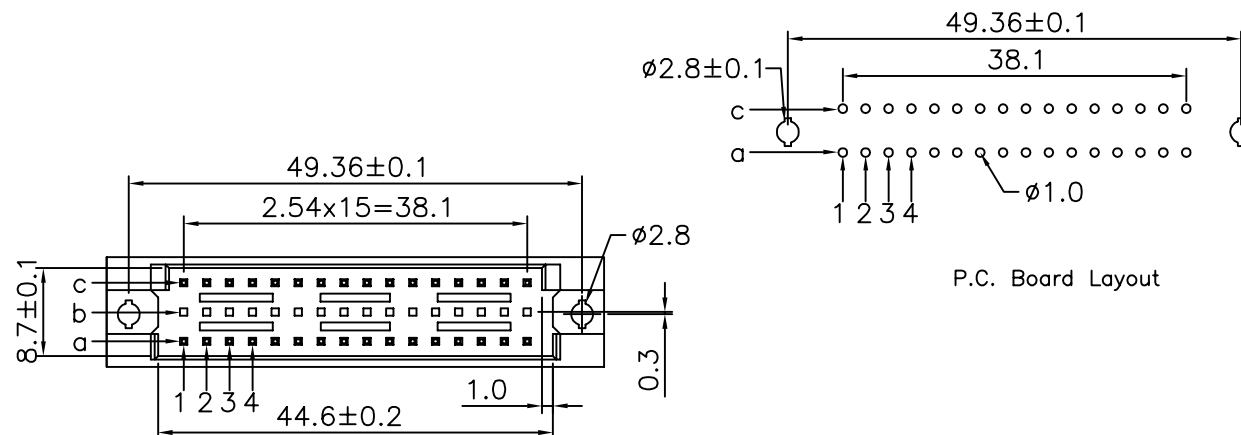




P.C. Board Layout

SPECIFICATIONS:

Current Rating : 2A
 Dielectric Withstanding Voltage : AC1000V
 For 1 Minute
 Insulation Resistance : 1000Megohms Min.
 At DC 500V
 Contact Resistance : 30 Milliohms At DC 100mA
 Operating Temperature : -55°C To +105°C
 Housing : 30% Glass Filled PBT UL 94V-0
 Contacts : Brass

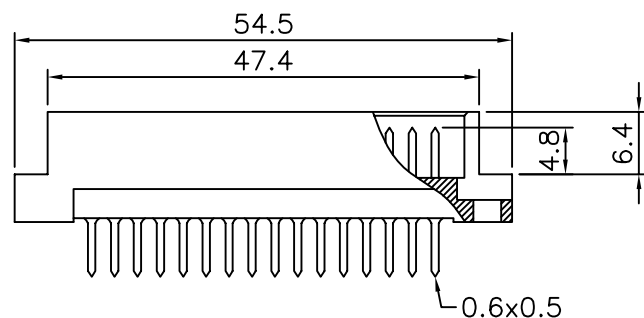

	X Length	1	2	W1	W2
		4.6	6.3	13	17
Pitch	Position	Rows With Contacts		Contact Arrange	
2.54mm	32	a	-	c	

DRAWING No.

05635

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

.X ±0.38

.XX ±0.25

AWG.

UNIT mm



AREA

REVISIONS

CHK

DATE